

SWIMMING POOL TILE

AZURE HARMONY SERIES


Where light and water find perfect balance.



AZURE HARMONY SERIES

Where Light And Water Find Perfect Balance


Azure Harmony reflects the quiet meeting of sky and water, where color, light, and calm blend effortlessly. Inspired by coastal horizons, its patterns echo gentle waves touched by morning light. Soft azures and tidal blues form a serene rhythm, bringing subtle depth and elegant tranquility to any pool.

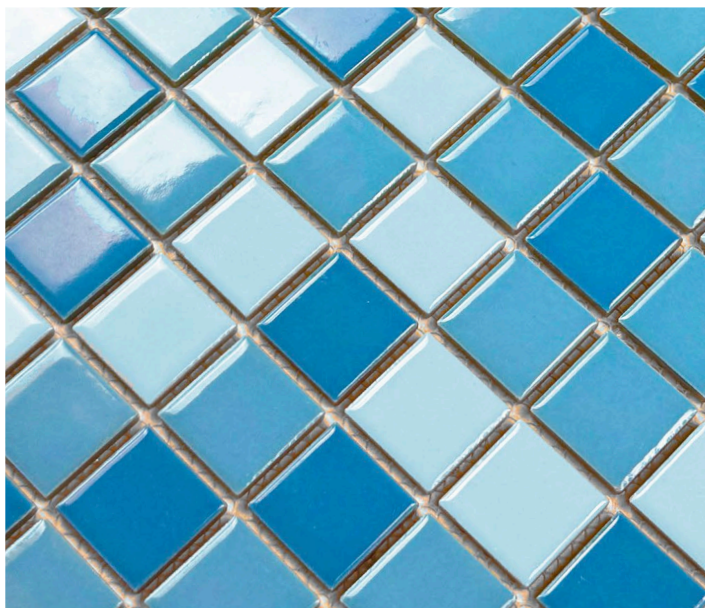


AZURE HARMONY SERIES




Chip Size: 25X25x5mm Sheet Size: 300x300x5mm Surface: Glossy
Material: Porcelain Package: 22Pcs/Box, 2Sqm/Box, 10Kg/Sqm




SP-MCS630830




SP-MCS630831



SP-MCS630833



SP-MCS630834




SP-MCS630836


AZURE HARMONY SERIES




Chip Size: 25X25x5mm Sheet Size: 300x300x5mm Surface: Glossy
Material: Porcelain Package: 22Pcs/Box, 2Sqm/Box, 10Kg/Sqm




SP-MCS630857



SP-MCS630860



SP-MCS630855




SP-MCS630870


AZURE HARMONY SERIES




Chip Size: 48X48x6mm Sheet Size: 306x306x6mm Surface: Glossy/Matte
Material: Porcelain Package: 22Pcs/Box, 2Sqm/Box, 12Kg/Sqm



SP-MCS650750
Glossy




SP-MCS650751
Glossy



SP-MCS650752
Glossy



SP-MCS650754
Glossy




SP-MCS650756
Glossy


AZURE HARMONY SERIES




Chip Size: 48X48x6mm Sheet Size: 306x306x6mm Surface: Glossy/Matte
Material: Porcelain Package: 22Pcs/Box, 2Sqm/Box, 12Kg/Sqm




SP-MCS650757
Glossy




SP-MCS650758
Glossy




SP-MCS650771
Matte



SP-MCS650760
Glossy




SP-MCS650761
Matte



SP-MCS650755
Glossy


AZURE HARMONY SERIES

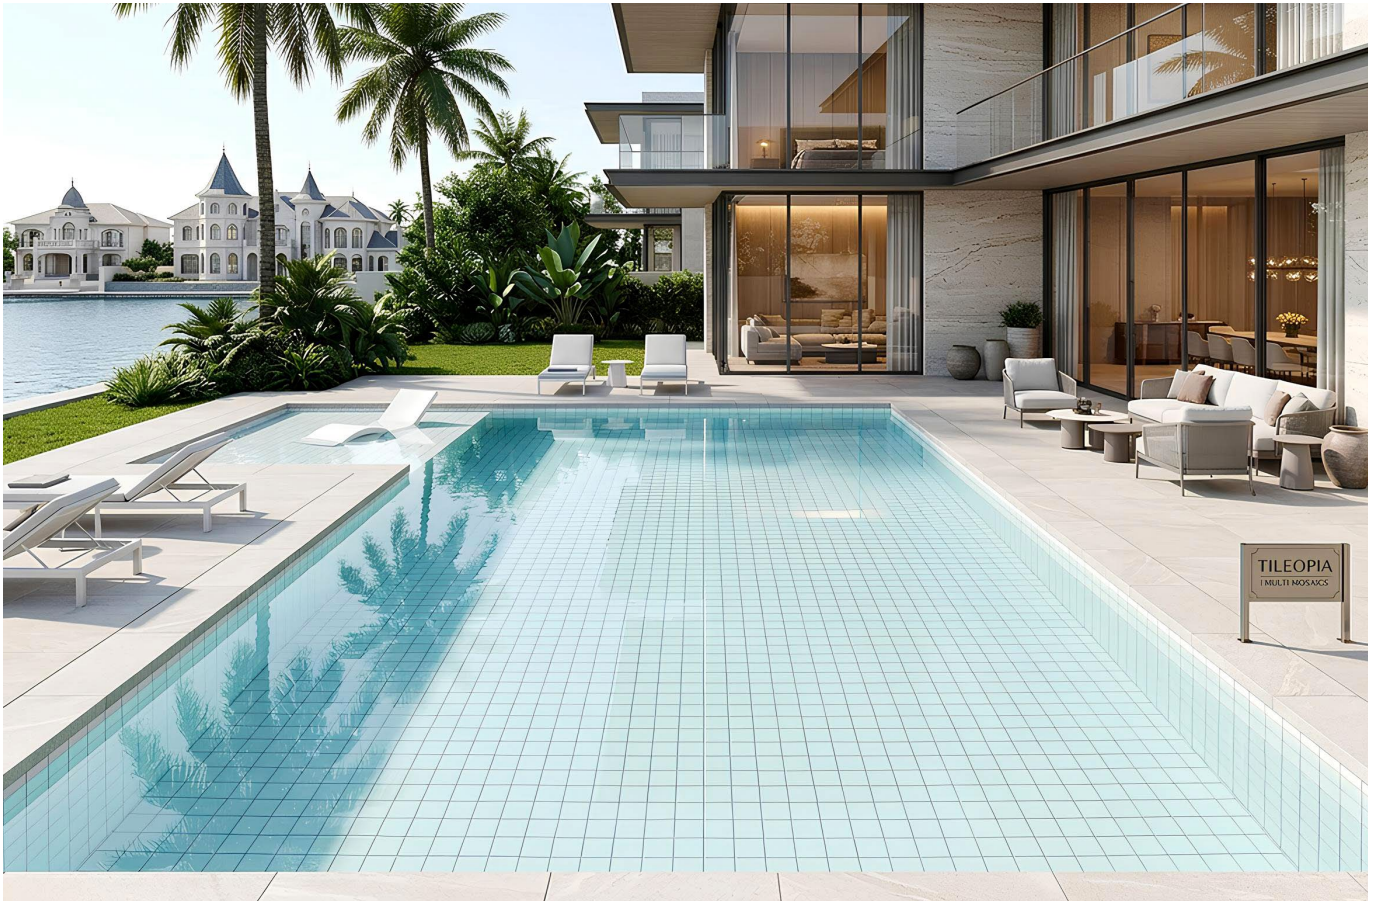

Chip Size: 97X97x6mm Sheet Size: 300x300x6mm Surface: Glossy
Material: Porcelain Package: 22Pcs/Box, 2Sqm/Box, 12Kg/Sqm



SP-MCS690555



SP-MCS690557



SP-MCS690560

Test Report*

No.	Test Items	Unit	Technical Requirements		Test Results	Verict
1	Chip Size (25mmx25mmx5mm)	mm	Length	± 0.05	-0.02~0	Pass
		%	Thickness	± 6	+1.7~+3.3	
2	Line	mm	-----		2.0~2.1	-----
3	Sheet Size	mm	-----		300~300.2	-----
4	Surface quality (Premium Grade)	-----	It should meet the requirement of the standards in Table 3 of clause 5.2		Conformed	Pass
5	Water absorption	%	Average value $E \leq 0.5$ Individual maximum 0.6		0.05	Pass
6	Resistance to thermal shock	-----	No burst or crack appears after the test		Conformed	Pass
7	Frost resistance	-----	No crack or peeling after the frost test		Conformed	Pass
8	Crazing resistance	-----	No crazing or peeling on the glazed surface after the crazing test.		Conformed	Pass
9	Resistance to household chemicals & swimming pool salts	-----	Minimum GB		Class GA	Pass
10	Color difference	-----	All the mosaic should be the same color basically		Conformed	Pass
11	Bond between mosaic and mounted tile underlay	-----	No falling off		Conformed	Pass
12	Exposure of mounted tile underlay	-----	The mounted tile underlay should not be exposed		Conformed	Pass
13	Resistance to staining	-----	Mininum class 3		Class 5	Pass

*THIS TEST REPORT APPLIES TO THE FOLLOWING SERIES OF PRODUCTS:SP-MCS630830, SP-MCS630831, SP-MCS630833, SP-MCS630834, SP-MCS630836, SP-MCS630855, SP-MCS630857, SP-MCS630860, SP-MCS630870

Test Report*

No.	Test Items	Unit	Technical Requirements		Test Results	Verict
1	Chip Size (48mmx48mmx6mm)	mm	Length	±0.5	-0.2~0	Pass
		%	Thickness	±6	+1.7~+3.3	
2	Line	mm	-----		3.4~3.5	-----
3	Sheet Size	mm	-----		306~306.2	-----
4	Surface quality (Premium Grade)	-----	It should meet the requirement of the standards in Table 3 of clause 5.2		Conformed	Pass
5	Water absorption	%	Average value $E \leq 0.5$ Individual maximum 0.6		0.07	Pass
6	Resistance to thermal shock	-----	No burst or crack appears after the test		Conformed	Pass
7	Frost resistance	-----	No crack or peeling after the frost test		Conformed	Pass
8	Crazing resistance	-----	No crazing or peeling on the glazed surface after the crazing test.		Conformed	Pass
9	Resistance to household chemicals & swimming pool salts	-----	Minimum GB		Class GA	Pass
10	Color difference	-----	All the mosaic should be the same color basically		Conformed	Pass
11	Bond between mosaic and mounted tile underlay	-----	No falling off		Conformed	Pass
12	Exposure of mounted tile underlay	-----	The mounted tile underlay should not be exposed		Conformed	Pass
13	Resistance to staining	-----	Mininum class 3		Class 5	Pass

*THIS TEST REPORT APPLIES TO THE FOLLOWING SERIES OF PRODUCTS: SP-MCS650750, SP-MCS650751, SP-MCS650752, SP-MCS650754, SP-MCS650755, SP-MCS650756, SP-MCS650757, SP-MCS650758, SP-MCS650760, SP-MCS650761, SP-MCS650771

Test Report*

No.	Test Items	Unit	Technical Requirements			Test Results	Verdict
1	Size and difference (97mm×97mm×6mm)	mm	Length	The deviation,of the average size for each tile from the work size	±0.9	-0.4~-0.2	Pass
		mm	Thickness	The deviation,of the average size for each tile from the work size	±0.5	+0.2~+0.3	
2	Straightness of sides	mm	±0.75			-0.18~+0.26	Pass
3	Rectangularity	mm	±0.75			-0.17~+0.21	Pass
4	Surface flatness	mm	Edge curvature		±0.75	-0.04~+0.27	Pass
			Warpage		±0.75	-0.20~+0.22	
			Center curvature		±0.75	-0.18~+0.24	
5	Surface quality	-----	A minimum of 95%of the tiles shall be freefrom visible defects that would impair the appearance of a major area of tiles.			Conformed	Pass
6	Water absorption	%	Average value E ≤ 0.5 Individual maximum 0.6			0.16 0.13~0.18	Pass
7	Breaking strength	N	When the thickness<7.5 mm,the average breaking strength shall not be less than 700			1086	Pass
8	Modulus of rupture	MPa	Average minimum 35 Individual minimum 32			42 39~46	Pass
9	Crazing resistance	-----	No crazing or peeling on the glazed surface after the crazing test.			Conformed	Pass
10	Frost resistance	-----	No crack or peeling after the frost test			Conformed	Pass
11	Resistance to staining	-----	Mininum class 3			Class 5	Pass
12	Resistance to household chemicals &swimming pool salts	-----	Minimum B			Class A	Pass

*THIS TEST REPORT APPLIES TO THE FOLLOWING SERIES OF PRODUCTS: SP-MCS690555, SP-MCS690557, SP-MCS690560

ROMAN[®]
M O S A I C O