

# SWIMMING POOL TILE

## MAGESTIC NATURALE SERIES





*LET NATURE'S MAJESTY SHAPE YOUR POOL*




# MARBLE LAGOON SERIES

*Immerse Your Pool in Marble's Tranquil Beauty.*

Marble lagoon captures the meeting of still water and sculpted stone a serene moment where time seems to pause. Inspired by a tranquil lagoon at dawn, its patterns convey purity and calm, with soft blues, aquas, and misty whites that mirror sunlight drifting through clear water, revealing effortless depth and elegance.

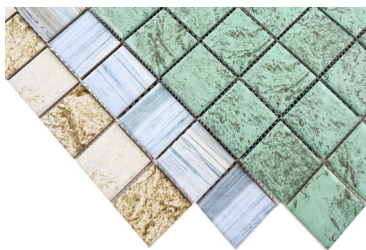
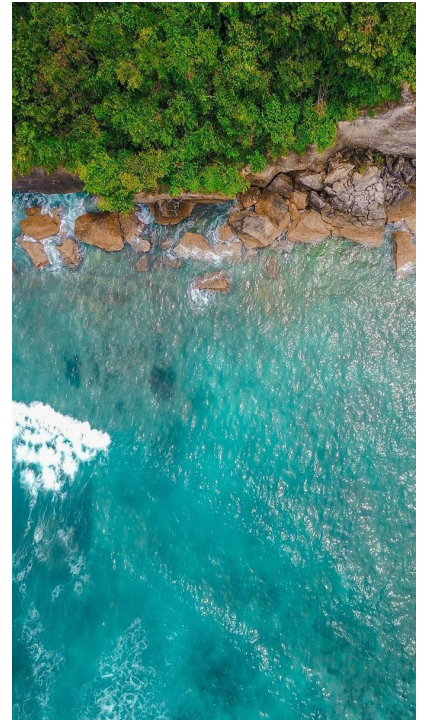


306x306x6mm




300x300x6mm

# MARBLE LAGOON SERIES

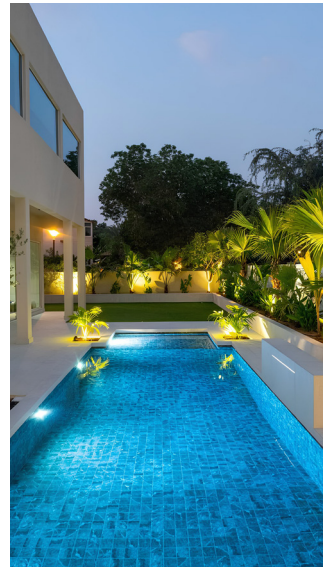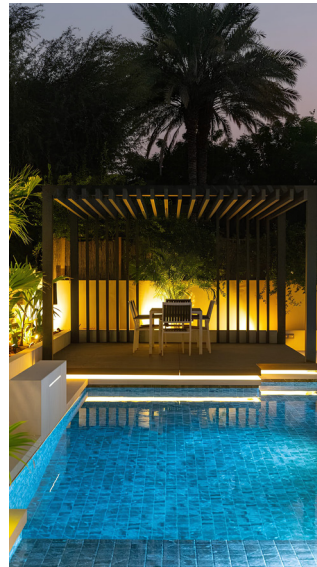


Chip Size: 48x48x6mm Sheet Size: 306x306x6mm Surface: Molded Texture (Matte)  
Material: Porcelain Package: 22Pcs/Box, 2.06Sqm/Box, 12Kg/Sqm



MCP650301



MCP650302




MCP650303



MCP650304




Chip Size: 97x97x6mm Sheet Size: 300x300x6mm Surface: Molded Texture (Matte)  
Material: Porcelain Package: 20Pcs/Box, 1.8Sqm/Box, 12kg/Sqm




MCP690601



MCP690602



MCP690603

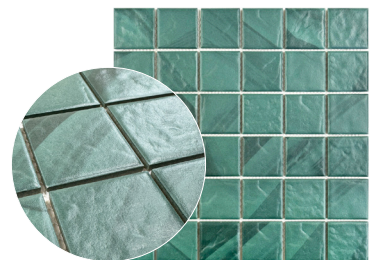

MCP690604

# MARBLE LAGOON SERIES




Chip Size: 48x48x6mm Sheet Size: 306x306x6mm Surface: Molded Texture (Matte)  
Material: Porcelain Package: 22Pcs/Box, 2.06Sqm/Box, 12Kg/Sqm



MCP650305



MCP650306



MCP650307




Chip Size: 97X97x6mm Sheet Size: 300x300x6mm Surface: Molded Texture (Matte)  
Material: Porcelain Package: 20Pcs/Box, 1.8Sqm/Box, 12kg/Sqm



MCP690605



MCP690606

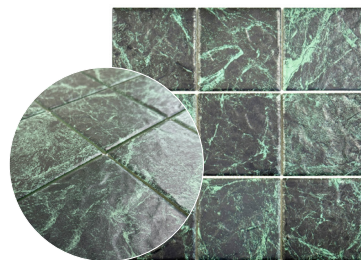

MCP690607

# MARBLE LAGOON SERIES




Chip Size: 48x48x6mm Sheet Size: 306x306x6mm Surface: Flat Texture (Matte)  
Material: Porcelain Package: 22Pcs/Box, 2.06Sqm/Box, 12Kg/Sqm




MCP650308



MCP650309



MCP650310



MCP650311



Chip Size: 97X97x6mm Sheet Size: 300x300x6mm Surface: Flat Texture (Matte)  
Material: Porcelain Package: 20Pcs/Box, 1.8Sqm/Box, 12kg/Sqm




MCP690608



MCP690609



MCP690610





MCP690611

# TERRA LUXE SERIES

*Where Natural Splendor Meets Modern Living.*

Terra Lux Series is Inspired by Van Gogh & Monet. It captures the poetic rhythm of drifting clouds and gentle horizons. Its colors—soft cerulean, deep indigo, and brushed gold—flow together like moonlit water touched by dawn. Echoing the expressive strokes of Van Gogh and the tranquil light of Monet, each tile becomes a canvas where motion and stillness meet.

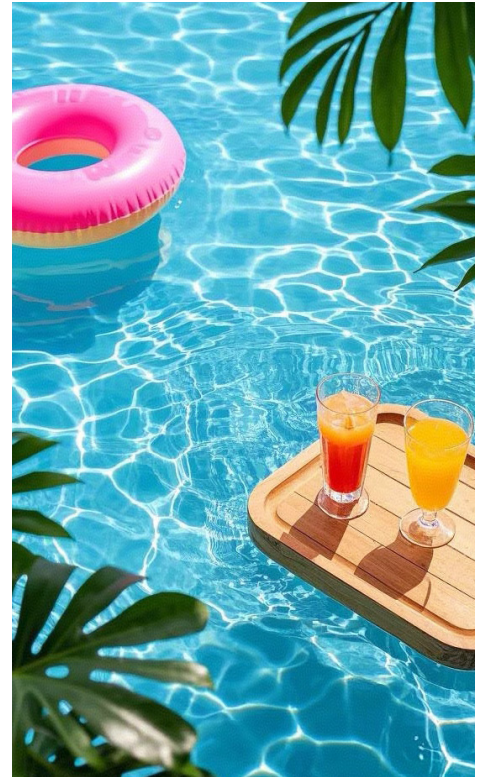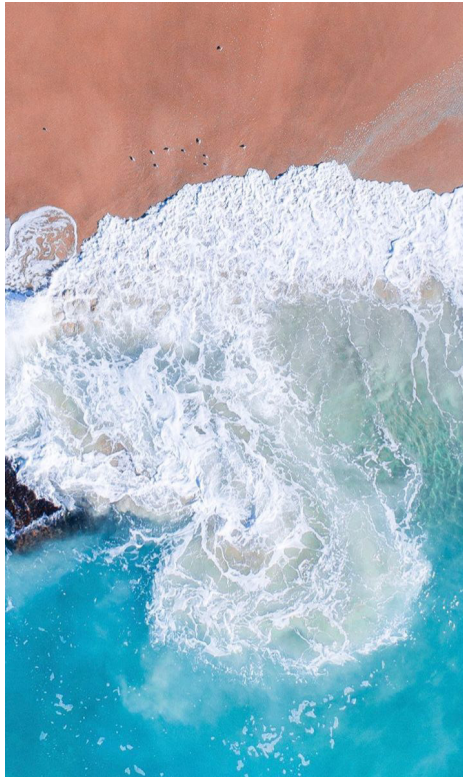

Leaf Green




Neon Blue




Sky Blue




Lava Grey



Mint Green



Cobalt Blue

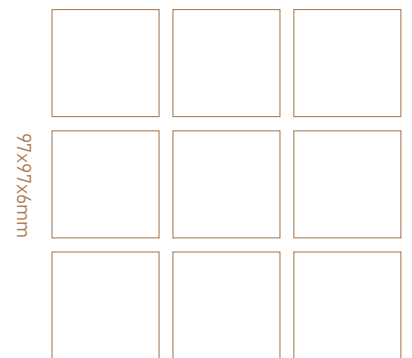

300x300x6mm

# TERRALUXE SERIES



Chip Size: 97X97x6mm Sheet Size: 300x300x6mm Material: Porcelain  
Surface: Molded Texture (Matte) Package: 2 Sqm/Box, 22 Pcs/Box, 12Kg/Sqm



MCP697011




MCP697012




MCP697013



MCP697014



MCP697015


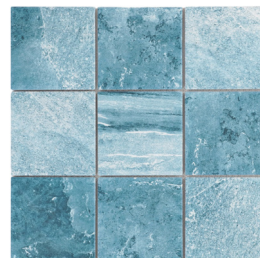


MCP697016


# VINCENT WAVES SERIES

*Feel the serenity of waves under every step.*

The Vincent Wave embody the soulful motion of swirling skies and rolling tides. Shades of blue and gold blend like moonlight on the sea, serene yet full of life. Each tile echoes the harmony of nature's calm and movement, bringing depth and quiet elegance to any space like gazing into a starry ocean.

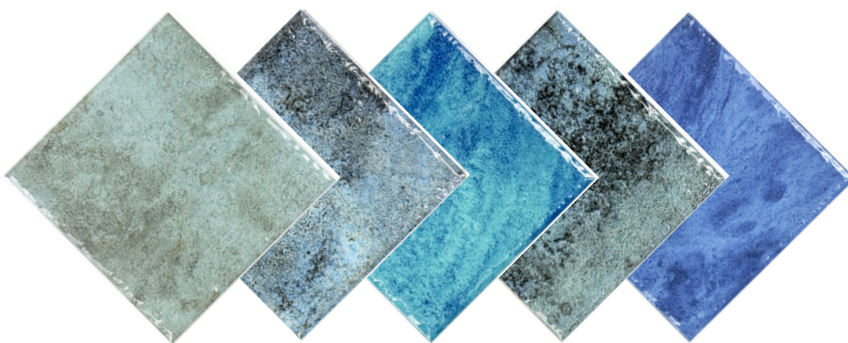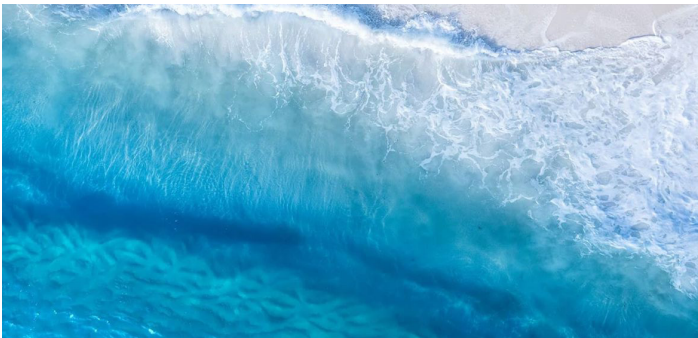

Nile Blue    Yale Blue    Tiffany Blue    Sky Grey    Royal Blue




150x150x8mm


# VINCENT WAVE




Chip Size: 150x150x8mm    Material: Porcelain    Surface: Flat (Glossy)  
Package: 0.9Sqm/Box, 40 Pcs/Box, 14Kg/Sqm

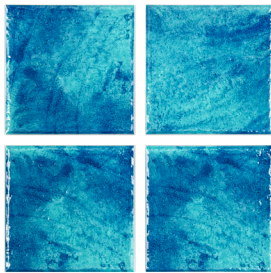


MPB151521

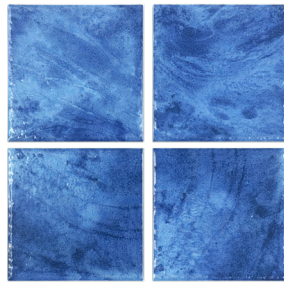


MPB151522

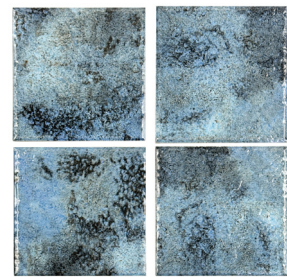

MPB151523

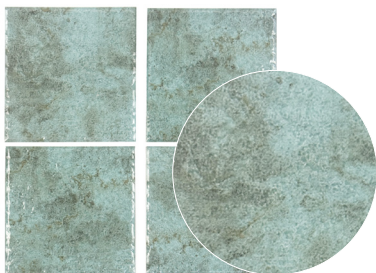

MPB151524



MPB151525

# Test Report\*

No.	Test Items	Unit	Technical Requirements		Test Results	Verict
1	Chip Size (48mmx48mmx6mm)	mm	Length	±0.5	-0.2~0	Pass
		%	Thickness	±6	+1.7~+3.3	
2	Line	mm	-----		3.4~3.5	-----
3	Sheet Size	mm	-----		306~306.2	-----
4	Surface quality (Premium Grade)	-----	It should meet the requirement of the standards in Table 3 of clause 5.2		Conformed	Pass
5	Water absorption	%	Average value ≤ 0.5 Individual maximum 0.6		0.16 0.13~0.34	Pass
6	Resistance to thermal shock	-----	No burst or crack appears after the test		Conformed	Pass
7	Frost resistance	-----	No crack or peeling after the frost test		Conformed	Pass
8	Crazing resistance	-----	No crazing or peeling on the glazed surface after the crazing test.		Conformed	Pass
9	Resistance to household chemicals & swimming pool salts	-----	Minimum GB		Class GA	Pass
10	Color difference	-----	All the mosaic should be the same color basically		Conformed	Pass
11	Bond between mosaic and mounted tile underlay	-----	No falling off		Conformed	Pass
12	Exposure of mounted tile underlay	-----	The mounted tile underlay should not be exposed		Conformed	Pass
13	Resistance to staining	-----	Mininum class 3		Class 5	Pass

\*This test report applies to the following series of products: MCP650301, MCP650302, MCP650303, MCP650304, MCP650305, MCP650306, MCP650307, MCP650308, MCP650309, MCP650310, MCP650311.

# Test Report\*

No.	Test Items	Unit	Technical Requirements			Test Results	Verdict
1	Chip Size (97mm×97mm×6mm)	mm	Length	The deviation,of the average size for each tile from the work size	±0.9	-0.4~-0.2	Pass
		%	Thickness	The deviation,of the average size for each tile from the work size	±0.5	+0.2~+0.3	
2	Straightness of sides	mm	±0.75			-0.18~+0.26	Pass
3	Rectangularity	mm	±0.75			-0.17~+0.21	Pass
4	Surface flatness	mm	Edge curvature	±0.75	-0.04~+0.27	Pass	
			Warpage	±0.75	-0.20~+0.22		
			Center curvature	±0.75	-0.18~+0.24		
5	Surface quality	-----	A minimum of 95%of the tiles shall be freefrom visible defects that would impair the appearance of a major area of tiles.			Conformed	Pass
6	Water absorption	%	Average value E ≤ 0.5 Individual maximum 0.6			0.26 0.21~0.36	Pass
7	Breaking strength	N	When the thickness<7.5 mm,the average breaking strength shall not be less than 700			826.3	Pass
8	Modulus of rupture	MPa	Average minimum 35 Individual minimum 32			42 39~46	Pass
9	Crazing resistance	-----	No crazing or peeling on the glazed surface after the crazing test.			Conformed	Pass
10	Frost resistance	-----	No crack or peeling after the frost test			Conformed	Pass
11	Resistance to staining	-----	Minimum class 3			Class 5	Pass
12	Resistance to household chemicals &swimming pool salts	-----	Minimum B			Class A	Pass

\*This test report applies to the following series of products: MCP690601, MCP690602, MCP690603, MCP690604, MCP690605, MCP690606, MCP690607, MCP690608, MCP690609, MCP690610, MCP690611, MCP697011, MCP697012, MCP697013, MCP697014, MCP697015, MCP697016

# Test Report\*

No.	Test Items	Unit	Technical Requirements		Test Results	Verict
1	Piece Size (150mmx150mmx8mm)	mm	Thickness	±5%	8.2mm	Pass
		%	Deviation of average size from work size	±0.6%	0.2%	Pass
		%	Deviation of average thickness from work size thickness	±5%	0.08%	Pass
2	The max from deviation straightness related to corresponding work size	%	±0.5%		0.19%	Pass
3	Water Absorption	%	≤0.5		0.0-0.12	Pass
4	Breakage index	N	>1300N		1715	Pass
5	Surface resistance to scratching	Mohs	Minimum 3		5	Pass
6	Coefficient of linear thermal expansion from ambient temperature rise to100°C	-----	Optional		-	Pass
7	Resistance to abrasion by rubbing (wear)	-----	Report		Class 3	Pass
8	Moduls of rupture	Mpa	Average minimum 35 Individual minimum 32		40	Pass
9	Moisture expansion	-----	Acc Iso 10545-4		Acc Iso 10545-4	Pass
10	Breakage strength	N	When the thickness<7.5 mm,the average breaking strength shall not be less than 700		1700	Pass
11	Resistance to thermal shock	-----	No defects or visible changes		ok	Pass
12	Resistance of glazed tiles to crazing	-----	No crazing		ok	Pass
13	Small color differences	-----	Iso 10545-16		Iso 10545-16	Pass
14	Resistance to staining	-----	Min class 3		Class 5	Pass
15	Resistance to domestic chemicals and swimming pool detergents except detergents containing hydrofluoric acid or its composites	-----	Min GB		GB	Pass

\*This test report applies to the following series of products: MPB151521,MPB151522,MPB151523,MPB151524,MPB151525

ROMAN<sup>®</sup>  
M O S A I C O